

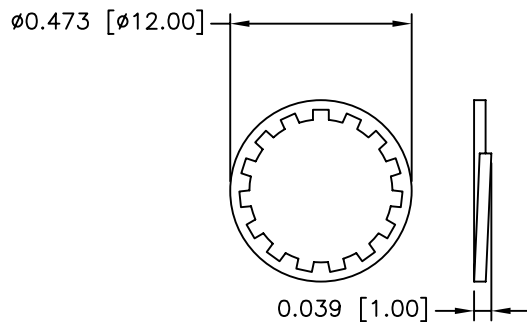
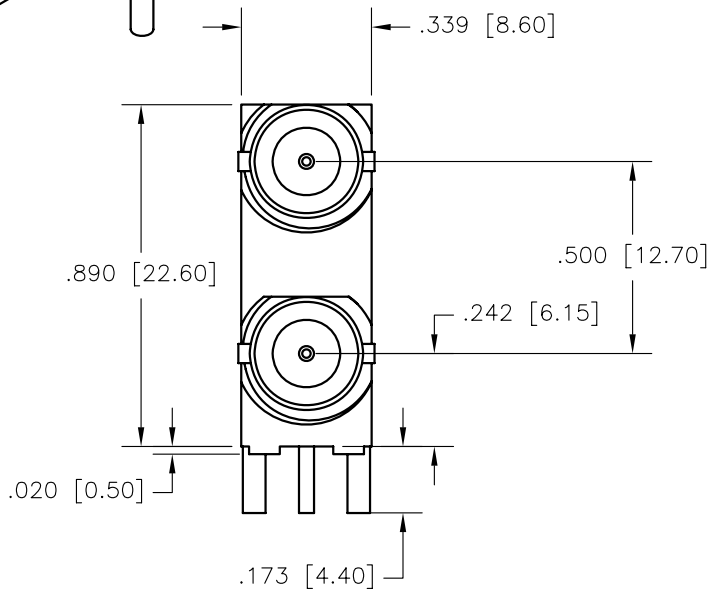



PCB LAYOUT  
TOP VIEW

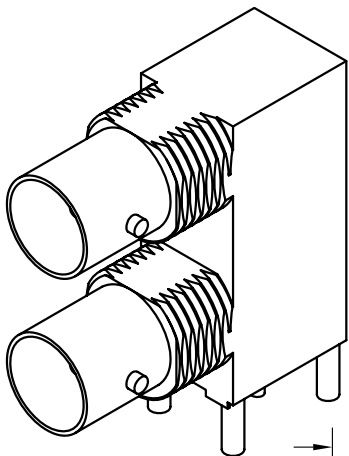

LOCK WASHER

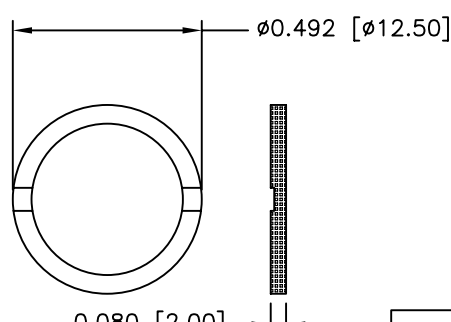

ROUND NUT

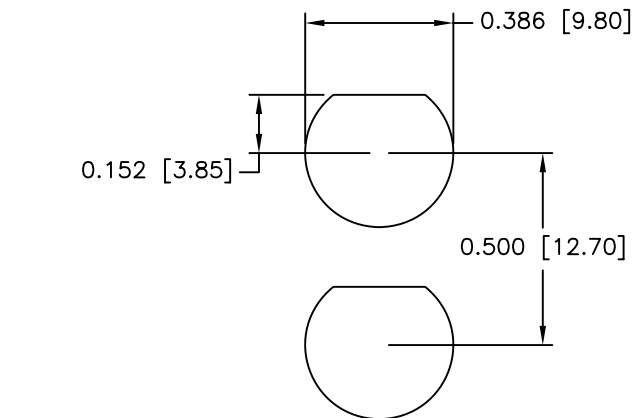

PANEL CUT OUT

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

MECHANICAL:  
SHIELDED HOUSING: ZINC ALLOY – GOLD PLATED  
MATING CONTACTS: PHOSPHOR BRONZE – GOLD PLATED  
PC MOUNT CONTACTS: BRASS – GOLD PLATED  
INSULATORS: 20% TEFLON FILLED DELRIN HOMOPOLYMER  
WASHER: STEEL – NICKEL PLATED  
NUT: STEEL – NICKEL PLATED  
NUMBER OF MATING CYCLES: 500 MIN.

ELECTRICAL:  
IMPEDANCE: 75 OHMS.  
RETURN LOSS: >30dB @ 750 MHz.  
CONTACT RESISTANCE: 3.0 MilliOhm Max.  
OPERATING VOLTAGE: 500V RMS  
DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS  
INSULATION RESISTANCE: 5000 MegOhm Min..  
MAXIMUM TEMPERATURE RANGE: –55°C to +105°C

THIS IS A CONTROLLED DOCUMENT AND IS  
SUBJECT TO CHANGE. CONTACT NORTHERN  
TECHNOLOGIES ENGINEERING FOR THE  
LATEST REVISION.

UNLESS OTHERWISE SPECIFIED  1. ALL DIMENSIONS ARE IN INCHES [MM] 2. DIMENSIONS ARE TYPICAL		Northern Technologies				THIS DRAWING IS THE PROPERTY OF NORTHERN TECHNOLOGIES AND SHOULD NOT BE REPRODUCED WITHOUT NORTHERN TECHNOLOGIES WRITTEN PERMISSION.	
		PART NUMBER RBNCRMDE7S0000ZZ					
DRAWN Luis C.	18-MAR-08	DESCRIPTION BNC MINI DUAL PORT RIGHT ANGLE PCB MOUNT CONNECTOR					
CHECKED JSD	18-MAR-08	SIZE B	CODE 200_238	DWG NO. 0002-200-238			REV
ISSUED	18-MAR-08	SCALE NTS			SHEET 1 OF 1		